


X438BV-FSR LED HDTV

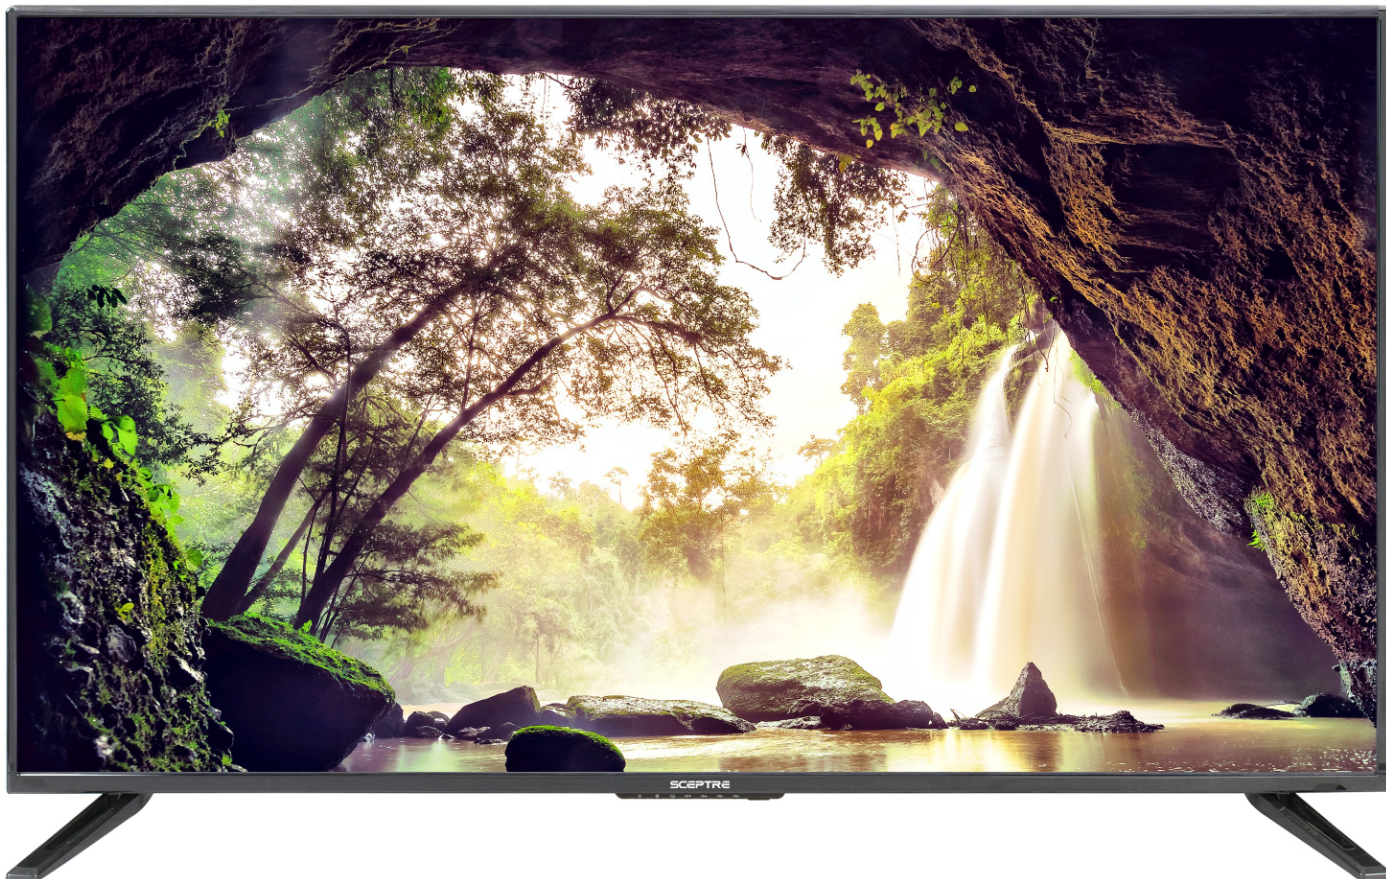

Specification

Display

Active Screen Size	42.5" Diagonal Viewable
Native Resolution	1920 x 1080
Refresh Rate	60Hz
Aspect Ratio	16:9
Display Colors	16.7M (8-bit)
Response Time	9.5ms (G-to-G)
Pixel Pitch	0.49005mm (H) x 0.49005mm (V)
Dynamic Contrast Ratio	1,000,000 : 1
Color Gamut	sRGB: 97% DCI-P3: 74%
Contrast Ratio	5,000 : 1
Brightness (Typ.)	250 cd/m ²
Viewing Angle	178° (Horizontal) / 178° (Vertical)
Backlight Life	50,000+ Hours
Surface Treatment	Antiglare (Haze 1%), Hard coating (3H)

Features

On Screen Display Control (OSD)	Picture, Sound, Channel, Setup
---------------------------------	--------------------------------

Color Temperature	Warm, Normal, Cool, Standards
Adjustable Picture Control*	Brightness, Contrast, Backlight, Color, Tint, Sharp
Picture Presets	Normal, Wide, Cinema, Zoom
Built-in Tuner	ATSC / NTSC / Clear QAM
OSD Supported Languages	English (Default), Spanish, French, Chinese
Weak Signal Enhancement	Yes
Comb Filter	3D
De-interlace Technology	3D
Auto Dynamic Contrast Mode	Yes
Noise Reduction	Yes
MPEG Noise Reduction	Yes
Surround Sound Mode	Yes (SRS TruSurround HD)
Sound Equalizer Settings	Yes (5-band)
Auto Volume Level Control	No
Wall Mountable	Yes
Energy Guide	Yes

Audio Features

Speakers	2 ×10W/6Ω
----------	-----------

Video Features

White Balance	Available
---------------	-----------

Signal Compatibility

VGA Input Signal Support	1920 x 1080 @ 60Hz (Native & Max)
--------------------------	-----------------------------------

Inputs & Outputs

HDMI (# of Ports & Version)	3 × HDMI (only HDMI1 with MHL function)
Supported HDMI Signals	1080/24p, 1080/60p, 1080i, 720p, 480p, 480i
Cable / Antenna Input	1 × IEC-Connector 75Ω
3.5mm Auxiliary Input Jack	1 × Earphone terminal (black)
Supported HDTV Signals	1080p,1080i, 720p, 480p, 480i
SPDIF Audio Output	1 × SPDIF (Optical, Black)
VGA (# of Ports)	1 × D-SUB terminal (Blue, 15 pin)
Component (YPbPr) Input	1 × Component (Audio input share with composite)
USB	1 × USB 2.0
Composite Video	1 × Composite (Video input share with component)
Analog Audio Output (L + R)	1 (2 × RCA terminals (White, Red))

Mechanical Features

VESA Mount Pattern (mm)	200mm x 100mm
VESA Mount Screw Size (mm)	M6 x 10mm
Stand Screw Size & Quantity (mm)	ST4 x 16mm (4 pcs)


Dimensions

With Stand (inches, W x H x D)	38.01" x 23.34 x 7.94"
Without Stand (Inches, W x H x D)	38.01" x 21.97" x 3.50"
Carton Box Dimension (inches, W x H x D)	42.60" x 25.79" x 5.94"

Power Consumption

Power Range	100-240V~, 50/60Hz, 3.0A (Max.)
Maximum Power Consumption	75 W
Standby Power Consumption	≤0.5W
Weight	
Net Weight with Stand (lbs)	15.2 lbs
Net Weight without Stand (lbs)	14.93 lbs
Gross Weight (lbs)	20.93 lbs
Power	
Power Consumption (Typical)	41.3W
Regulations / Certifications	
Energy Star	7.0
Certificates	cTUVus, FCC, Energy Star, ISTA 6A
Compliances	HDMI, MHL
Warranty	
Limited Parts and Labor	One Year
What's in the Box?	
Remote Control Model No	8142026670003C

Key Features

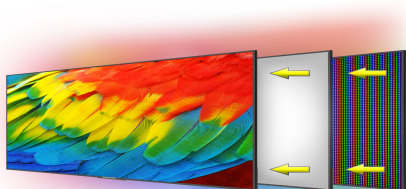

LED

With sharper contrasts of light and darks, LED display delivers a vast array of rich colors, ensuring that moving images have never been so pleasing to the eyes.



HDMI

HDMI not only delivers superior digital video and audio, but also, connects both to the TV with only one cable.



USB Port

Let's you view your pictures as a slideshow or listen to your favorite music via the USB port. Just insert your flash drive into the USB port for the ultimate entertainment.



Energy Star V7.0

By meeting EPA and DOE standards, Sceptre's ENERGY STAR-qualified products prevent greenhouse gas emissions and provide energy savings for customers.



Customer Service

Our customer service representatives are, and have always been, based in the USA, guaranteeing that our customers' needs are met as efficiently as possible.



30+ Years of Experience

Founded in City of Industry, CA over 30 years ago, Sceptre Inc. made a promise to create & deliver superior products for remarkably affordable prices, a rare tradition that continues today.